DSN Radar Upgrade Study

1. Current Situation
2. Study Goals & Execution
3. Summary of Results
4. Conclusions

Jon D. Giorgini

P. W. Chodas, M. A. Slade, R. A. Preston, D. K. Yeomans

Jet Propulsion Laboratory, California Institute of Technology

Most solid objects in solar system are covered with craters:

Moon

Asteroid 433 Eros

Mars

Venus

Alekseev, Mikheeva, Petrenko
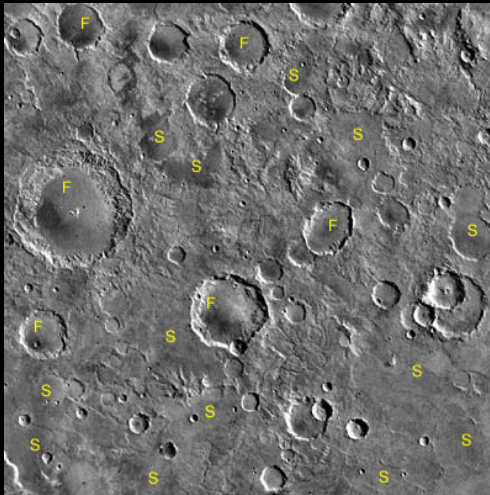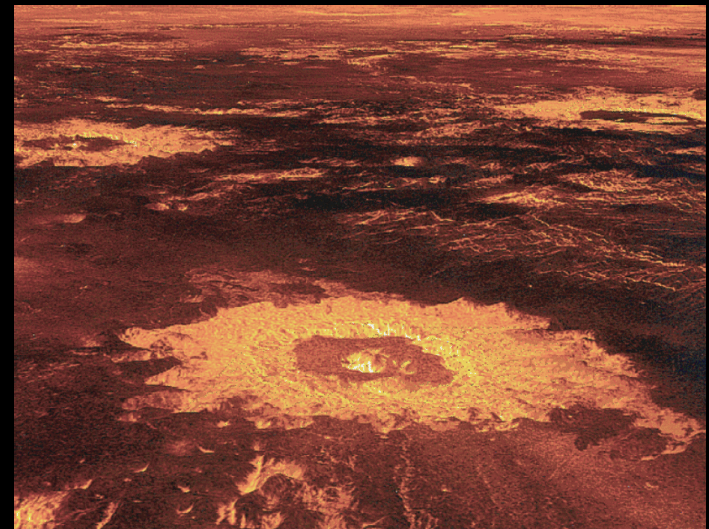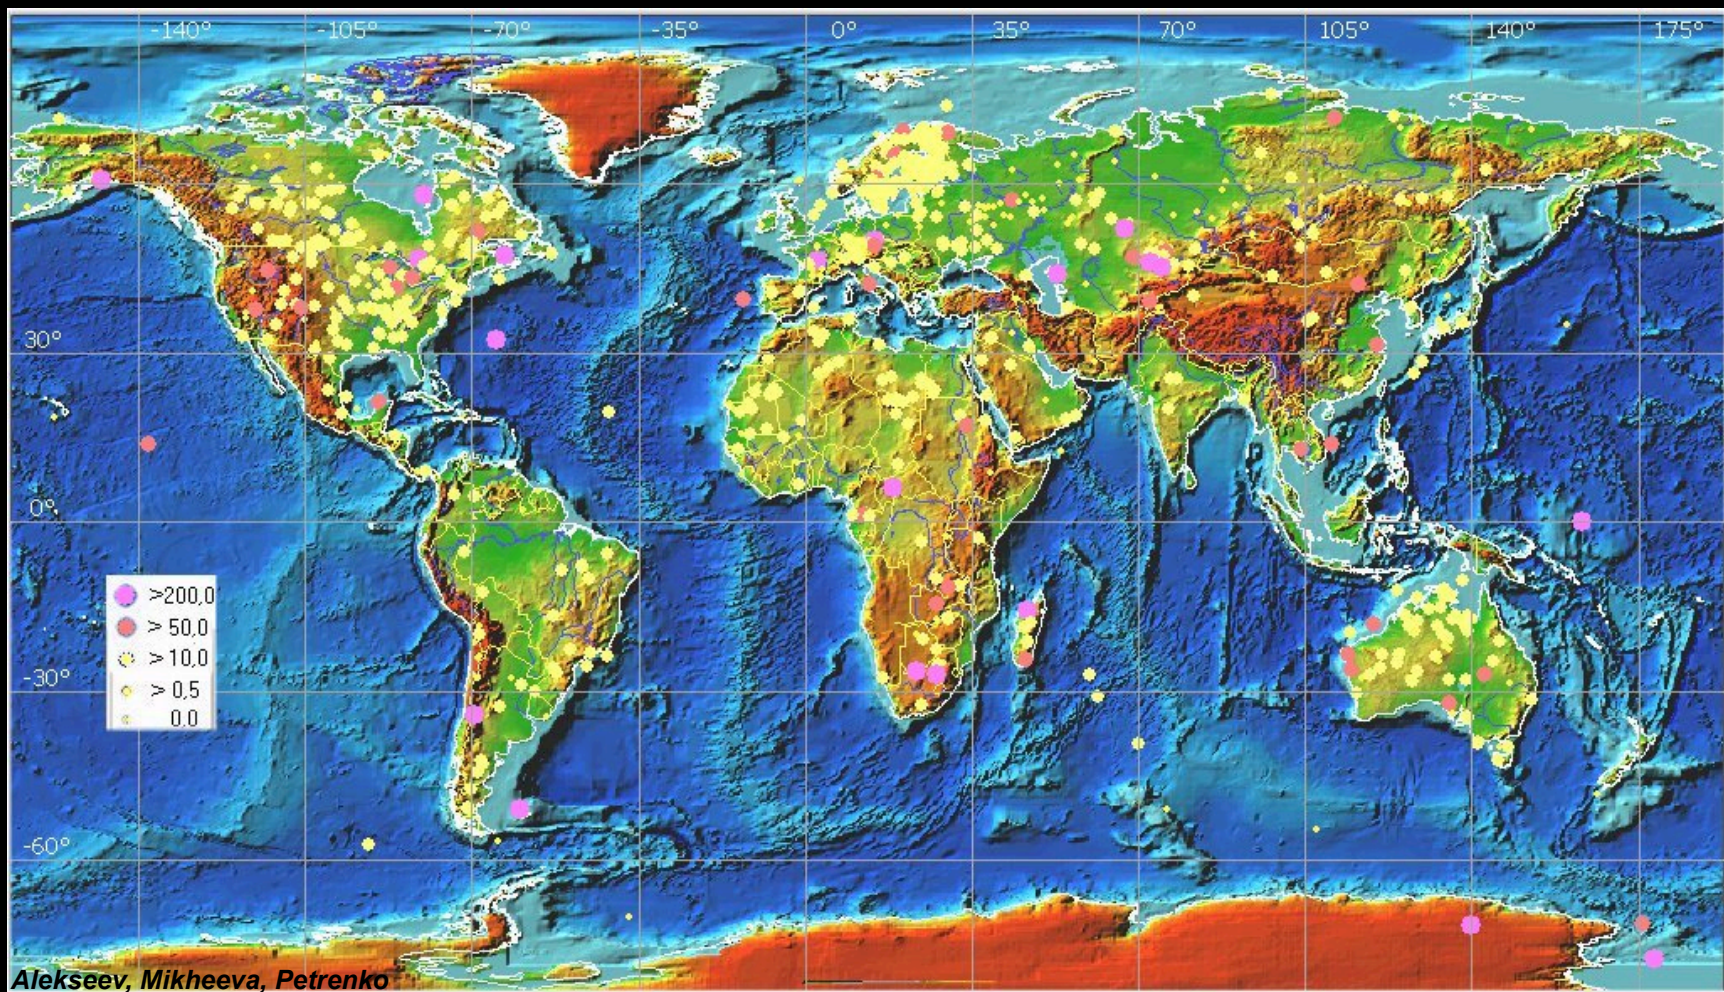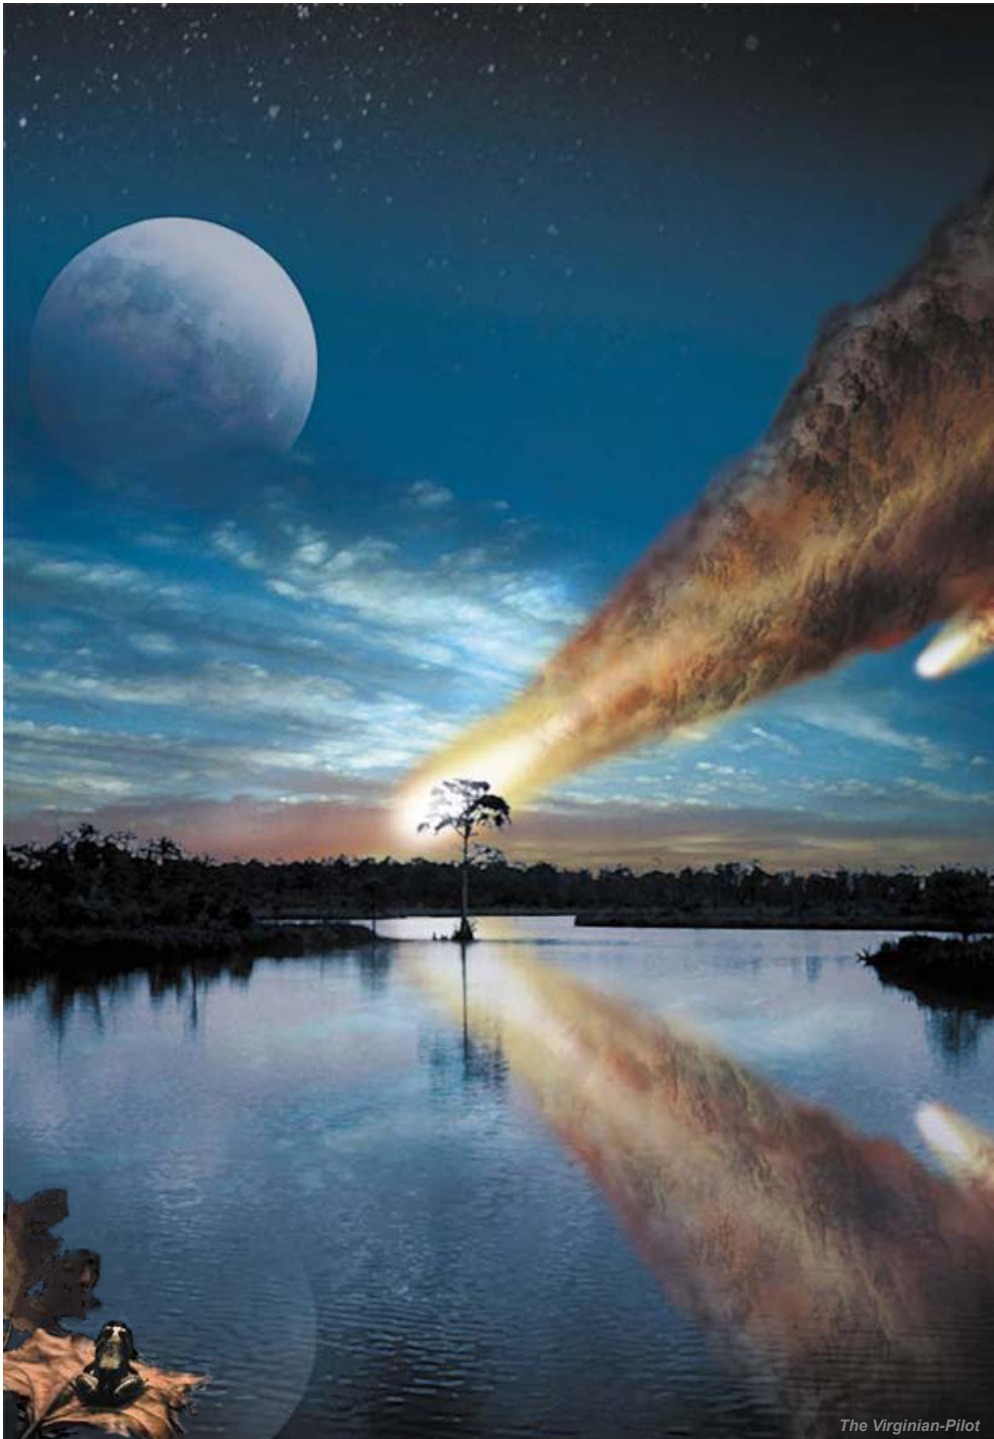
Tectonics, weathering & sedimentation erase craters on Earth, BUT …
- 175+ confirmed impact craters (PASSC, 2008)
- A few hundred other potential sites (Rajmon, 2008)

How Much Warning?

- If an asteroid is on a collision course, when will we know impact is likely?

- NASA supports spacecraft missions and ground-based optical efforts to find and assess potentially hazardous objects.

- How do DSN radar observations relate to this effort, and what role do they have in assessing risk?

- A study to statistically assess ground-based radar capabilities was performed.

The Virginian-Pilot

JPL/NASA Near-Earth Object Program Office

LINEAR telescope, Socorro NM

Known Near-Earth Asteroids
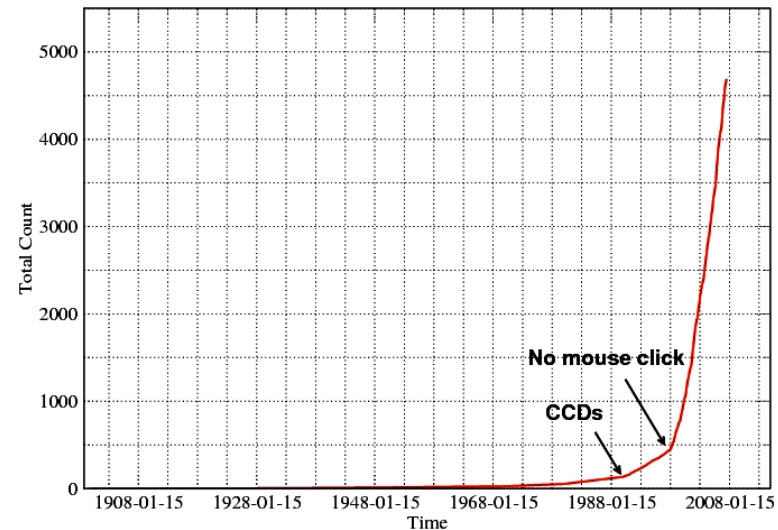
Goal: Discover 90% of near-Earth objects >1 km by 2009 ... <u>assess risk</u>

- Size-limit for impact to have global effects
- Formal start in 1998
- Currently: ~82% discovery level (757 of ~920)
- $4.1 million / year budget

Next: "Potentially Hazardous Asteroids" within 0.05 AU of Earth's orbit
Discover 90% of PHAs > 140 m diameter by end of 2020
Pan-STARRS to increase discovery rate ~10x (2009+)

Radar Systems

- Two adequately sized & powered RADAR <u>transmitters</u>:

  - DSS-14:   70 meter, ~430 kw (X-band), steerable (~all sky)
  - Arecibo: 305 meter, ~900 kw (S-band), pointing within 20 deg of zenith

- <u>Optical discovery</u> as "pixel" ... narrow beam-width <u>radar follow-up</u> resolves

- Radar can provide imaging & trajectory data comparable to spacecraft,

  for objects of greatest interest: those that encounter Earth

- Historically, ~2% of system time available/used for asteroid targets

Prediction Improvement Using Radar

RADAR DETECTIONS OF NEAR-EARTH ASTEROIDS

Figures: L. Benner

Of 230 radar-detected NEOs:

- 80% detected in last 10 years ...

Radar delay-Doppler measurements:
- Time-delay to 8 m (150-300 m typical)
- Doppler to 1.6 mm/s (8 mm/s typical)
- Used with optical RA/DEC angles in orbit soln.

- Radar astrometry has been obtained for:

  3.5% of 5718 known **NEOs**

  7.7% of   810 known **NEOs > 1 km**

  12.6% of   981 known **PHAs**
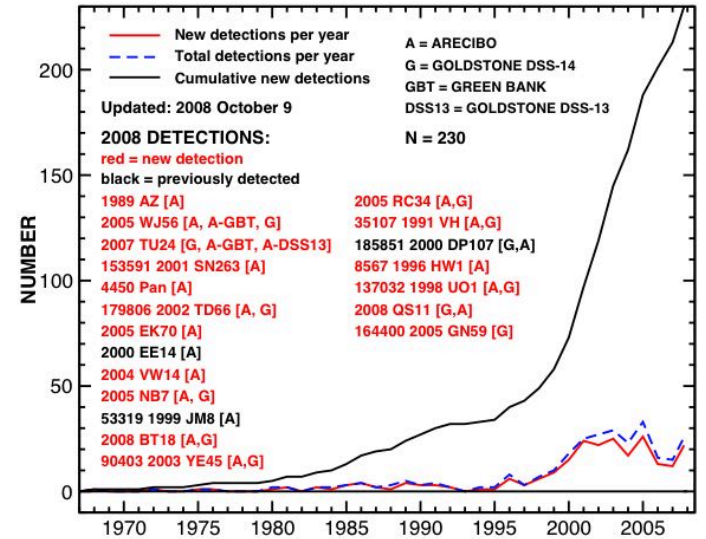
  25.5% of   145 known **PHAs > 1 km**

- Reduces orbit uncertainties ~10^5 (at discovery)

Interesting

↓

More interesting

1999 JM8

For PHAs, historical average <u>prediction extent</u> is …
<u>1st apparition</u> : +400 years w/radar, +80 years without radar
<u>2nd apparition</u>: +800 years with or w/o radar (radar can still cut uncertainties 50%)

Radar extends prediction window at discovery 5x, on average

Radar Performance Upgrade Study

Purpose:

Provide data relevant to DSN decisions on future NEO radar capability

Goal: Simulate three radar upgrade variations, in combinations:

1. Doubling GSSR radar transmit power (430 ➝ 900 kw)
2. New southern hemisphere site 70 m @ 900 kw (Canberra)
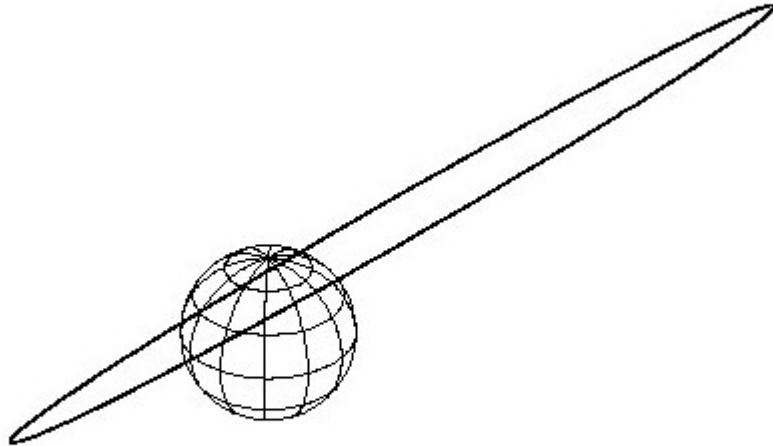3. Increasing delay accuracy (0.125 ➝ 0.026 usec)

... with respect to:

- Detectability
- Trajectory predictability
- Physical characterization

Implementation, logistics & observational goals **NOT** part of study

Why a Simulation?

- Impact probability is computed using the predicted position and predicted position uncertainties.

- Such predictions of the future depend on an orbit solution and its uncertainties.

- Orbit solution uncertainties depend on measurements of the object and their uncertainties.

- Therefore, a simulation was used to capture the full range of measurements and orbits for the impact problem.

Current Process:
1. Optical discovery
2. Assess: good radar target? (visibility, SNR, scheduling)
3. Orbit refinement (more optical); can take days or weeks
4. Pointing uncertainties small enough for radar?

Underlying Issues

1) **Radar detectability & characterization depend on echo strength:**

- <u>Signal-to-Noise Ratio (SNR)</u>; a function of ...
    - Observatory parameters: transmit power, receiver performance
    - $1 / (range)^4$ [gets weak fast with distance; main-belt limit]
    - $(diameter)^{1.5}$ [bigger target, stronger echo]
    - $(rotational\ period)^{0.5}$ [slower spin, stronger echo]
    - $\cos(sub\text{-}radar\ latitude)^{-0.5}$ [stronger echo as view ⟶ pole]
- Echoes must be summed ("integrated") over time

2) **Trajectory predictability depends on ...**

- Fraction of orbit sampled by measurements
- Accuracy and precision of measurements
- Interval between measurement & time of prediction
- Forces acting on object

Study Approach

To capture these issues, a full simulation was developed:
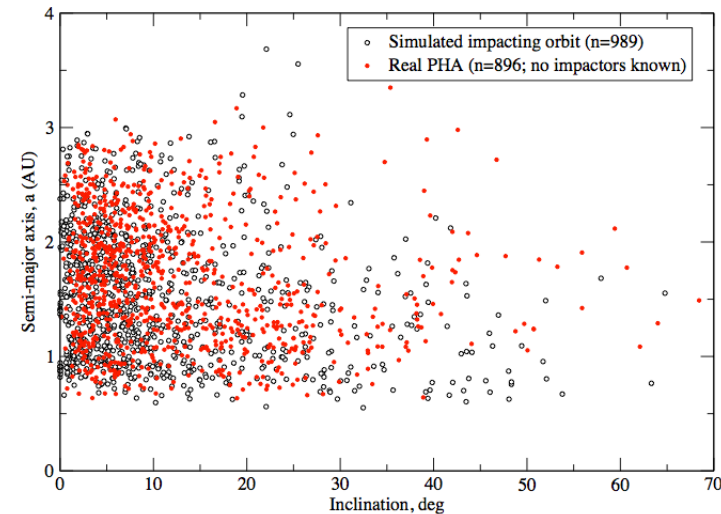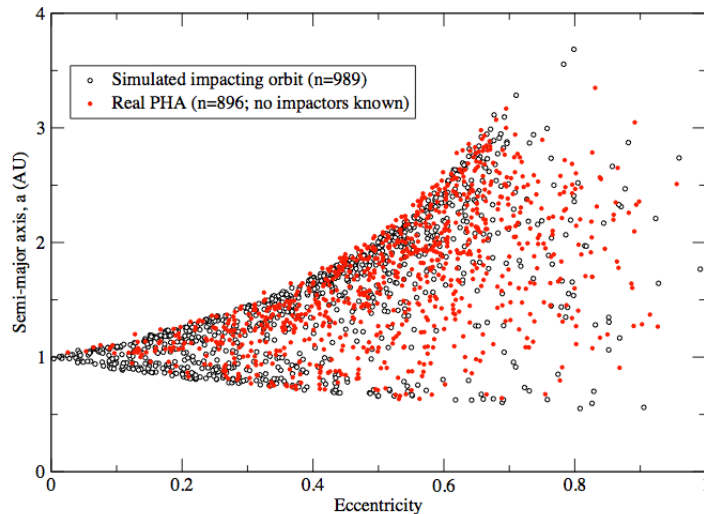
- Representative population of 989 <u>simulated</u> PHA orbits [Chesley & Spahr, 2003]
- All objects impact Earth ... by design

- Start with position 80 years prior to impact
- Numerically integrate three object sizes *per orbit* to impact: large (diam.= 700 m), medium (d= 140 m), small (d= 70 m)
- Find all times during 80 year interval when optically observable (after optical discovery), or radar detectable

Study Approach

-80 years   impact

First optical detection

First radar detection

Later detections
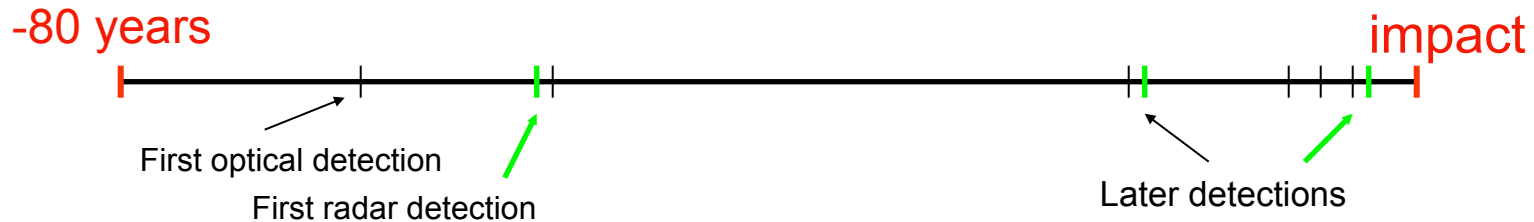
- Simulate reasonable optical & radar measurements

Optical rules	Radar rules:
Standard (H,G) magnitude model	GSSR/CSSR/Arecibo:
Solar elongation cut-off at 55 deg	- Dec. limits, xmit power & freq.,
No observations within 20 deg of Moon	antenna size & performance,
or within 3 days of full moon.	Integration time (3.5 hr, 1.5hr)
Discovery at V_{lim}= 20, follow-up to V_{lim}=22	SNR > 10
One obs. every 4 days (V= 21), to 4 per day (V= 18)	+/- 8 days around max. SNR
No observation errors	One delay, Doppler per day

- Compute impact probability & SNR as observations are added
- Operational software used for simulation

- Considered:
  - ✓ 9 radar/upgrade configurations (including current config.)
  - ✓ 1 optical-only control case

- Total of 118,680 cases
- Simulation run on 26-node CPU cluster (11 GB output)

Results: Detectability (1)

Earliest Optical Discovery of PHAs Within 80 Years of Impact
(2008 performance levels)
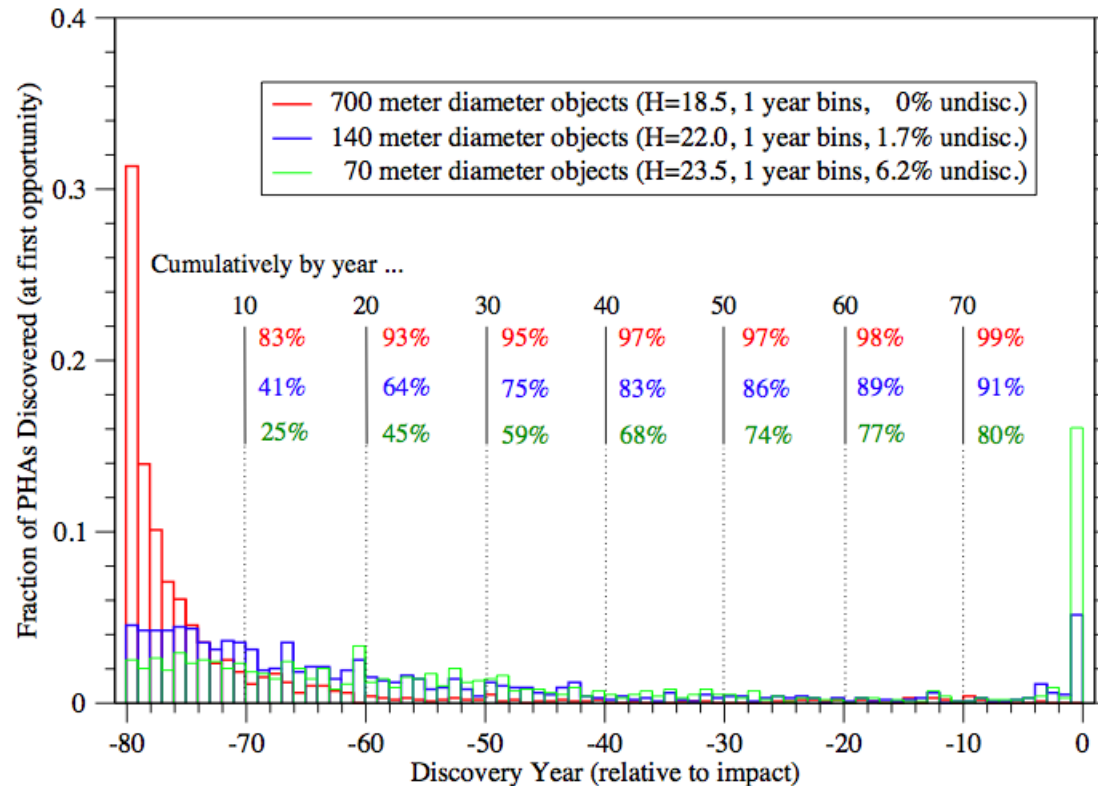
Optical discovery:
  700 m: All objects discovered prior to impact
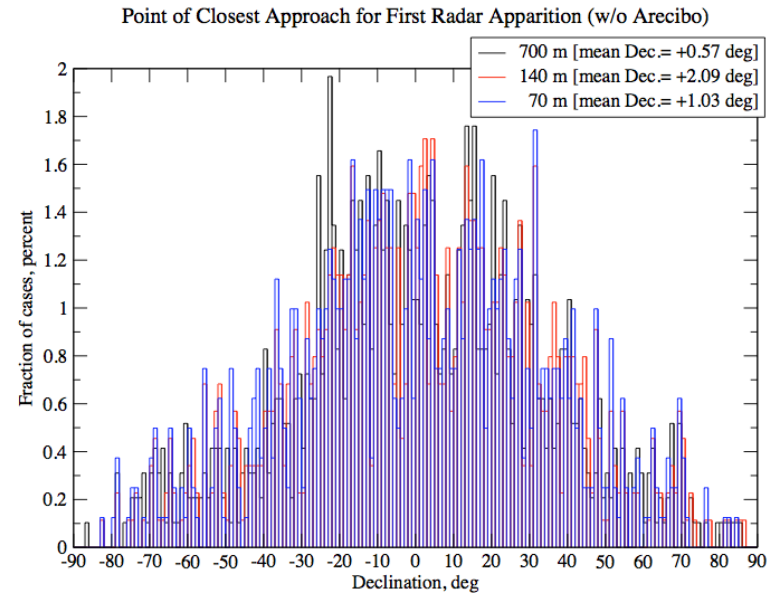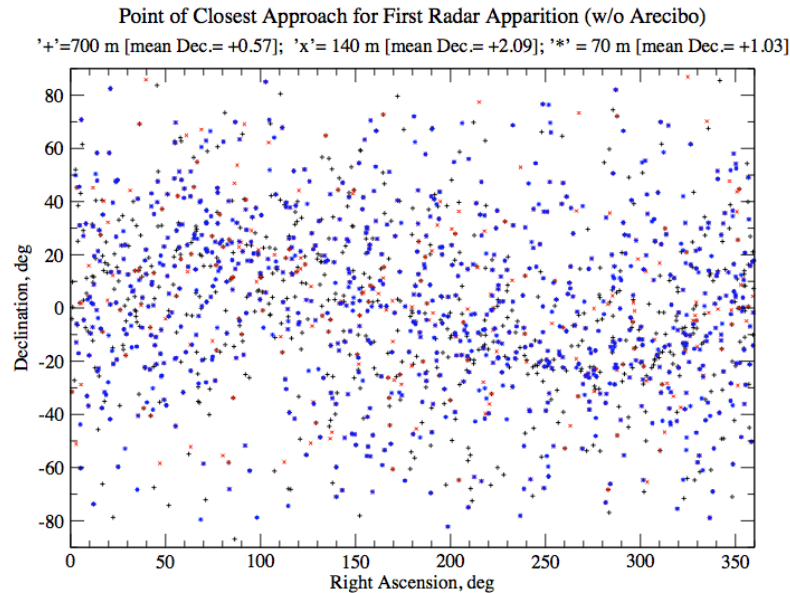 140 m: 1.7% *not* discovered before impact
  70 m: 6.2% *not* discovered before impact

Results: <u>Detectability (2)</u>

- <u>Arecibo</u>
  Capable of detecting 76-98% of discovered PHAs (>1 year prior to impact)

- <u>Current GSSR</u>:
  Capable of detecting 69-92% of discovered PHAs (>1 year prior to impact)

- **Doubling GSSR transmit power**:
  - ✓ Increases detectable population +5% (> 1 year prior to impact)

- **New southern site**, 70 m @ 900 kw
  - ✓ Could detect 73-95% of PHA's (increase +4% over current DSN)
  - ✓ 2 - 7% of PHA's are detectable ONLY by <u>southern</u> DSN site
  - ✓ 1 - 5% of PHA's are detectable ONLY by <u>northern</u> DSN site

- <u>Loss of radar</u>: reduces or eliminates warning, especially for 7-23% of impactors
  having "one-time-only" <u>optical</u> observing opportunities >1 year prior to impact
  (high potential for "unresolved impact uncertainty")

- Hypothetical "aggressive" radar program ("detect all detectable objects")
  with <u>current</u> systems could clarify impact prediction for 1-5% of detectable
  impactors (those with single apparition optical **AND** radar visibility)

Results: Detectability & Observing Time

Point of Closest Approach for First Radar Apparition (w/o Arecibo)
'+'=700 m [mean Dec.= +0.57]; 'x'= 140 m [mean Dec.= +2.09]; '*' = 70 m [mean Dec.= +1.03]

Point of Closest Approach for First Radar Apparition (w/o Arecibo)
700 m [mean Dec.= +0.57 deg]
140 m [mean Dec.= +2.09 deg]
70 m [mean Dec.= +1.03 deg]

- No significant north/south radar visibility distinction (max. SNR evenly distributed)
- Northern & southern sites each detect 1-7% of population other hemisphere cannot

- A hypothetical *__aggressive__* DSN radar program ("detect all objects possible") requires:

    ... 6+ years of cumulative transmit/receive cycles, over next 80 years,
        to detect all detectable objects > 140 m (~7500 objects)

    ... 29+ years xmit/receive to detect all detectable objects 70 -140 m (~37,000 objects)

- Current rate: ~140+ calendar yrs for DSN to cover next 20 yrs of new 140 m+ discoveries

- Southern site can increase scheduled time (share load) + increase track length
  to improve physical characterization. *Still "falls behind" if only 2% time scheduling.*
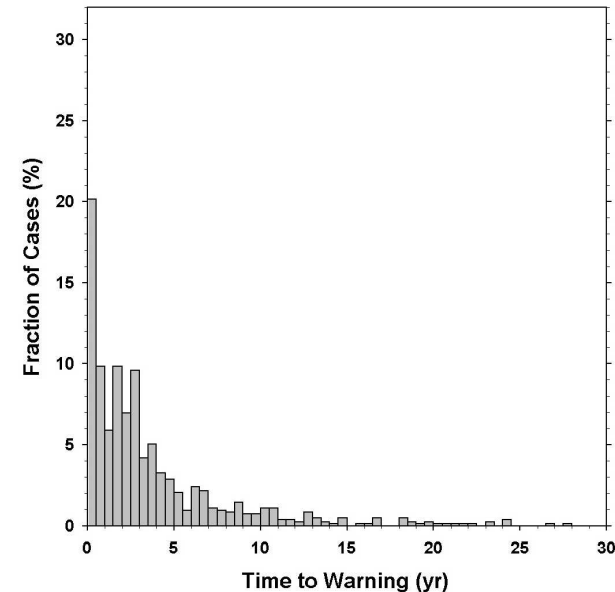
Impact Warning Time (700 m)

"Warning time" ... when impact probability reaches 50%
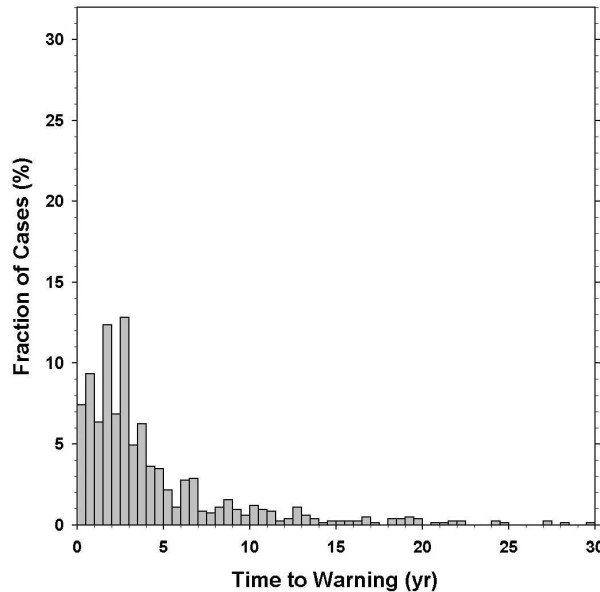
Optical only:
- Median warning within 2.9 yrs discovery
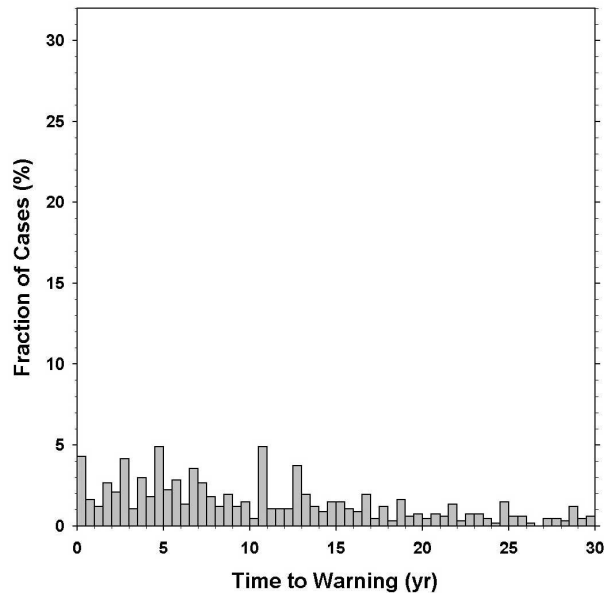- 75% of cases reach warning < 5 yrs

Optical + radar:
- Median warning within 2.3 yrs discovery
- 75% of cases reach warning < 4.2 yrs

- 50% warning usually reached in second apparition
- Radar advances warning time ~9 months for 700 m objects, averaged over population
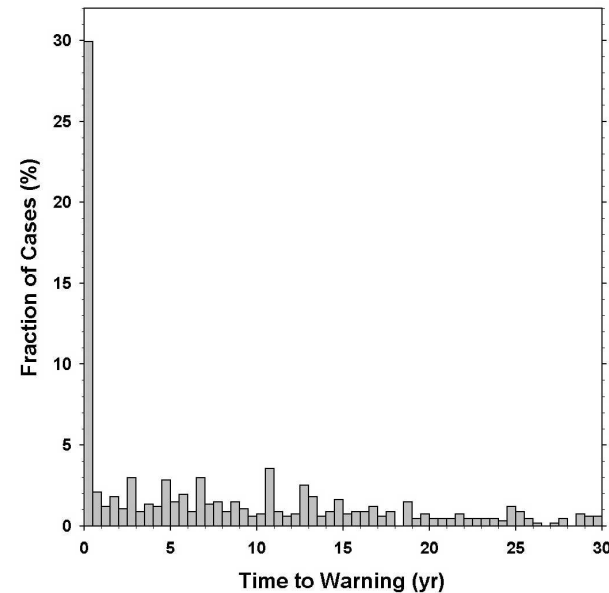
Impact Warning Time (140 m)

"Warning time" ... when impact probability reaches 50%

Optical only:
- Median warning within 10.5 yrs discovery
- 75% of cases reach warning < 18 yrs

Optical + radar:
- Median warning within 6 yrs discovery
- 75% of cases reach warning < 15 yrs
- *30% warn in 6 months*

- 50% warning usually reached in second apparition
- Radar advances warning time ~4 years for 140 m objects, <u>averaged over population</u>

Physical Characterization

- Physical characterization (science) ... categorized by maximum SNR:

  ✓ Minimal detection, polarization ratio = 10 < SNR < 20
  ✓ Low-resolution shape = 20 < SNR < 100
  ✓ Moderate-resolution shape = 100 < SNR < 1000
  ✓ High-resolution shape (& CHIRP) = SNR > 1000

  PHAs for which high-resolution physical characterization could be obtained:

	Est. No. Objects* >70 m	% pop.>70 m	% pop.>140 m
Arecibo + DSN upgrades	11400	18.1%	22.1%
Current (GSSR @ 430 kw + Arecibo)	11149	17.7%	21.8%
Arecibo alone	10703	17.0%	21.0%
DSN upgrades, no Arecibo	7480	11.9%	15.9%
GSSR @ 430 kw alone	5798	9.2%	13.4%

(Werner, 2002)

- An Arecibo shut-down, leaving …
  Current GSSR: -46% reduction in high-resolution radar targets
  +All upgrades : -33% reduction in high-resolution radar targets

- All upgrades (w/Arecibo): +2% increase in high-resolution radar targets

---

- Arecibo: more high-resolution characterization cases (> receiver collecting area)
- GSSR : finer spatial resolution for high-SNR targets (CHIRP + Doppler)

Summary & Conclusions

- Goldstone and Arecibo radars provide essential data relevant to protecting the Earth from impact hazards. They ...

    - ✓ Increase Earth encounter gross predictability 5x (from 80 to 400 years)
    - ✓ Increase impact warning time up to an average of 4 years
    - ✓ Provide physical characterization comparable to a spacecraft mission for cases of greatest interest (objects that come close)
    - ✓ Identify targets of interest for future spacecraft missions

- Existing radar capability is grossly under-utilized for small-bodies

    - ➢ Primary limitation: "2%" scheduling & resource sharing
    - ➢ Most effective upgrade to existing systems: additional observing time
    - ➢ Current DSN radar observation rate ~7-60x less than pace to "keep up" with potential optical discoveries, fully assess impact hazard in ~2 decades

- Increasing GSSR transmitter power would ***not*** greatly improve <u>risk reduction</u> (detectability +5%) or <u>population</u> characterization (high-res. SNR cases +0.3%)

- A new southern hemisphere radar site can significantly accelerate risk reduction and physical characterization:

    - ✓ Effectively increases available observing time 1.5 - 2x + by sharing load
    - ✓ Provides longer tracking passes for better characterization of many PHAs
    - ✓ Detects the 2 - 7% of targets uniquely visible in southern hemisphere